



DRIVE APRON DETAIL
TREELAWN GREATER THAN 6'-0"

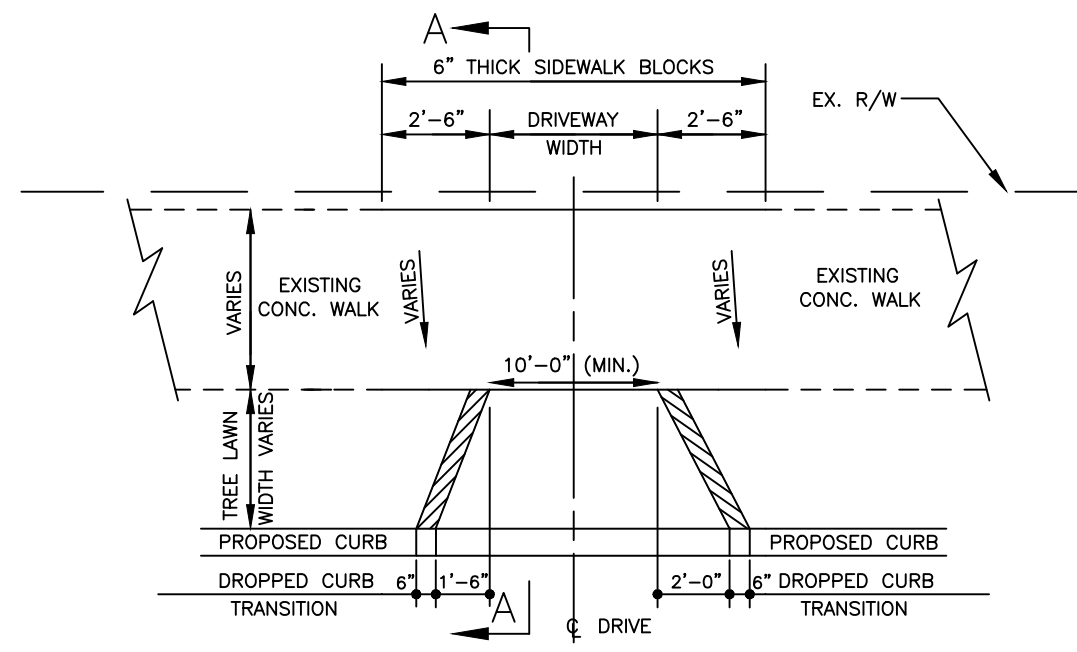


DRIVE APRON DETAIL
TREELAWN LESS THAN 6'-0"

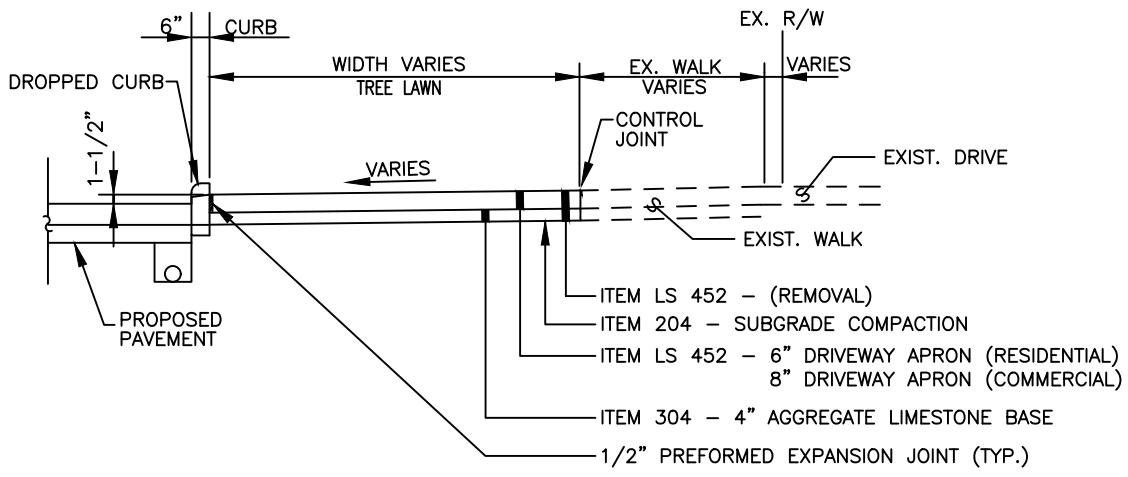

SECTION A-A

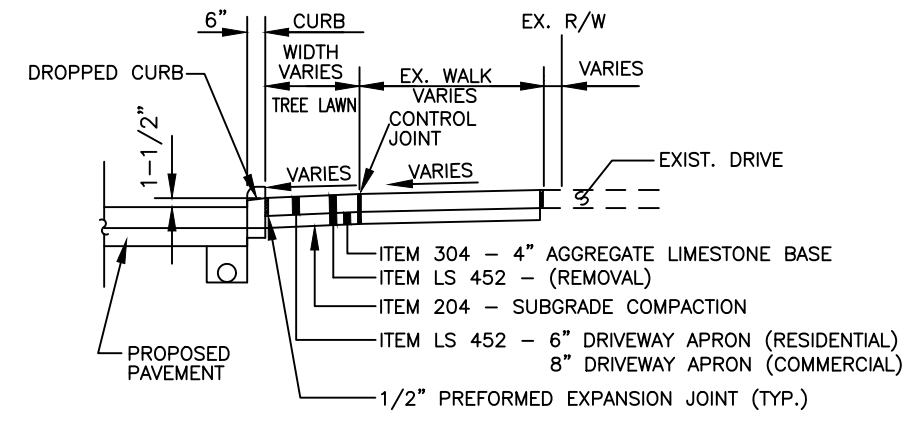

NEW DRIVEWAY APRON DETAIL
SCALE: NONE



SECTION A-A

NOTES:

1. DRIVE APRONS DISTURBED BY CONSTRUCTION SHALL BE REPLACED WITH ITEM LS 452 - FIBER REINFORCED CONCRETE PAVEMENT. PAYMENT SHALL INCLUDE ALL EXCAVATION AND DISPOSAL OF EXISTING APRONS AND SUBBASE STONE.
2. APRONS SHALL BE INSTALLED WITH MAXIMUM GRADE OF 12% SAG BREAK AND 8% CREST BREAK.
3. APRON PAVING SHALL INCLUDE ALL CURB ASSOCIATED WITH APRON CONSTRUCTION.

CITY OF LAKEWOOD, OHIO		DATE: 11-15-2024	
		 MARK PAPKE, PE, CPESC CITY ENGINEER	
REVISIONS:	01-31-2014 04-13-2015	SCALE:	N.T.S.
STANDARD DRAWING:	DRIVEWAY APRON DETAIL		
NUMBER:	P-2		
1	1		